

Wall build up:  
 - Newton cavity drainage system  
 - 70mm metal studs @ 600mm centres  
 - 18mm WBP ply  
 - 12.5 mm plaster and skim  
 Note: Allow for access to rodding eyes - setting out to be approved

Blockwork partition to achieve 60min FR - Refer to SE information

Wall build up:  
 - Newton cavity drainage system  
 - 70mm metal studs @ 600mm centres  
 - 18mm WBP ply  
 - 12.5 mm plaster and skim  
 Note: Allow for access to rodding eyes - setting out to be approved

Allow to replace ceiling

- Scope of Project
- Stud partition
- Blockwork

201\_As Proposed Basement floor  
 1 : 50


**Notes:**  
 Drawings are based on survey data and may not accurately represent what is physically present.  
 Do not scale from this drawing. All dimensions are to be verified on site before proceeding with the work.  
 All dimensions are in millimeters unless noted otherwise.  
 Purcell shall be notified in writing of any discrepancies.

ISSUE	DATE	DRAWN	CHECKED	DESCRIPTION
-	06/06/17	Author	Checker	

<b>CLIENT</b>	Oxford City Council
<b>PROJECT</b>	Museum of Oxford Project Status

<b>DRAWING TITLE</b>	As Proposed Basement Plan
<b>SIZE &amp; SCALE</b>	[A1] 1 : 50
<b>DRAWING STATUS</b>	ISSUED FOR INFORMATION

<b>JOB NUMBER</b>	237320
<b>DRAWING NO.</b>	201
<b>REVISION</b>	PRINTED: 28/07/2017 15:39:51

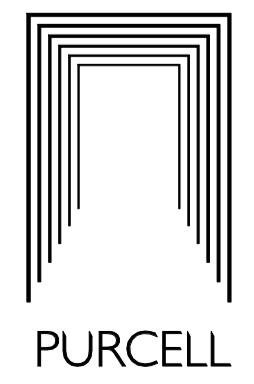

This page is intentionally left blank